


The following measurements are given as a guide. Actual measurements may vary to accommodate production. Seat fitting type: according to FIA regulations the seat must be fixed to the brackets by means of at least four bolts M8 class 8.8. The diagram shows the distances between the fixing points in mm.  
 \* For FIA 8855-1999 seats the weight refers to the complete seat (tolerance of 10%).  
 For FIA 8862-2009 seats the weight refers to the shell (tolerance of 10%).  
 \*\* referring to bottom fixing points of the sliding guide.  
**TYPE W:** inner side int. 289 mm **TYPE Y:** bottom 345x270 mm

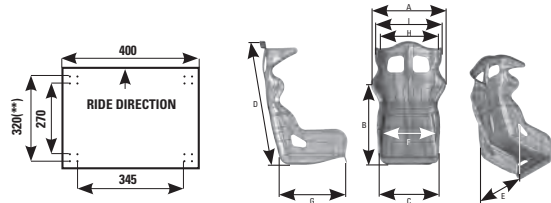

### LEGEND

A external max width at shoulders  
 B seat bottom to mid shoulders  
 C seat bottom max external width  
 D total height of seat back  
 E external max width at seat fixing inserts  
 F seat inner width (belt holes area)  
 G bottom length  
 H internal width between side head protections  
 I external width between side head protections  
 L height from the bottom to the harness slot  
**W = side fixing Y = bottom fixing**

HOMOLOG.	SHELL	AIRNET MATERIAL	CUSHIONS SPLIT LEG	A	B	C	D	E	F	G	H	I	L	HARNES SLOTS	WEIGHT* (KG)	FIXING	
<b>FIA 8862-2009 CARBON FIBER SEATS</b>																	
<b>HTE ONE LITE HA/807</b>																	
FIA 8862/2009	CARBON		✓	590	610	445	880	395	360	490	350	475	610	5	7.5	W	
<b>HTE ONE HA/761E / HTE ONE XL HA/798</b>																	
FIA 8862/2009	CARBON		✓	610	620	480	900	385	360	460	340	500	660	5	9.2	W	
FIA 8862/2009	CARBON XL		✓	660	670	470	990	395	350	480	300	500	740	5	10.1	W	
<b>HTE ONE S HA/801</b>																	
FIA 8862/2009	CARBON		✓	610	620	480	900	385	360	460	340	500	660	5	12.5	W	
<b>HRC-ONE LITE HA/800 / HRC-ONE LITE RC HA/805</b>																	
FIA 8862/2009	CARBON	✓	✓	620	610	455	880	395	365	480	350	480	615	5	6.8	W	
FIA 8862/2009	CARBON RC	✓	✓	595	610	440	880	395	360	490	350	500	615	5	6.8	W	
<b>HRC-ONE HA/789</b>																	
FIA 8862/2009	CARBON	✓	✓	600	620	470	900	390	370	470	350	480	630	5	9.2	W	
<b>HTC ONE HA/815</b>																	
FIA 8862/2009	CARBON	✓	✓	595	620	500	910	465	390	460	320	475	640	5	9	W	
<b>FIA 8855-1999 CARBON FIBER SEATS</b>																	
<b>HRC-R CARBON AIR HA/786 / HRC-R CARBON HA/788</b>																	
FIA 8855/1999	CARBON	✓	✓	615	635	460	890	395	365	470	345	490	620	5	6.0	W	
<b>HTE-EVO HA/817</b>																	
FIA 8855/1999	CARBON	✓		590	620	450	900	390	380	450	400	440	620	5	6.0	W	
<b>PROTOTIPO HA/745</b>																	
FIA 8855/1999	CARBON	✓	✓	530	520	440	790	385	380	480	360	450	570	5	6.1	W	
<b>HTE-R CARBON HA/768E / HTE-R CARBON XL HA/779E</b>																	
FIA 8855/1999	CARBON	✓	✓	560	560	465	880	390	370	470	330	490	665	5	6.6	W	
FIA 8855/1999	CARBON XL	✓	✓	560	580	485	890	425	390	490	330	490	665	5	6.8	W	
<b>WRC-R CARBON HA/769E</b>																	
FIA 8855/1999	CARBON	✓	✓	590	600	495	890	400	365	490	/	/	645	5	5.6	W	

HOMOLOGATION	SHELL	AIRTEX® MATERIAL	CUSHIONS SPLIT LEG	MEASURE IN MM													HARNES SLOTS	WEIGHT* (KG)	FIXING	
				A	B	C	D	E	F	G	H	I	L							
<b>FIA 8855-1999 FIBERGLASS SEATS</b>																				
<b>HTE-EVO HA/818</b>																				
FIA 8855/1999	FIBERGLASS	✓		590	620	455	910	390	375	460	390	450	620	5	9.9	W				
<b>HRC-R FIBERGLASS HA/793 / HRC-R FIBERGLASS XL HA/794</b>																				
FIA 8855/1999	FIBERGLASS	✓	✓	620	635	470	900	390	365	470	370	530	620	5	9.5	W				
FIA 8855/1999	FIBERGLASS XL	✓	✓	610	680	490	980	425	400	480	360	520	675	5	10.3	W				
<b>HTE-R HA/772E / HTE-R XL HA/771E / HTE-R 400 HA/781E</b>																				
FIA 8855/1999	FIBERGLASS	✓		560	570	515	880	420	390	490	315	480	665	5	9.9	W				
FIA 8855/1999	F.G.LASS 400 COMPACT	✓		560	570	515	880	420	390	490	315	400	665	5	9.8	W				
FIA 8855/1999	FIBERGLASS XL	✓		560	580	530	905	440	440	480	301	490	670	5	11.5	W				
<b>M+S HA/806F</b>																				
FIA 8855/1999	FIBERGLASS			600	650	480	880	410	400	440	/	/	650	5	8.5	W				
<b>WRC-R HA/773E / WRC-R XL HA/778E</b>																				
FIA 8855/1999	FIBERGLASS	✓	✓	620	600	510	890	410	390	480	/	/	645	5	8.9	W				
FIA 8855/1999	FIBERGLASS XL	✓	✓	665	600	520	920	430	415	480	/	/	700	5	10.9	W				
<b>ARS-R HA/774E</b>																				
FIA 8855/1999	FIBERGLASS	✓		590	600	500	910	420	370	490	/	/	615	5	9.9	W				
<b>RS-P.T. 2 HA/762E</b>																				
FIA 8855/1999	FIBERGLASS			565	560	510	880	420	395	480	340	510	675	5	10.4	W				
<b>CHAMP-R HA/766E</b>																				
FIA 8855/1999	FIBERGLASS			590	575	520	890	400	360	480	/	/	615	5	8.9	W				
<b>FIRST-R HA/790</b>																				
FIA 8855/1999	FIBERGLASS			620	600	510	890	410	390	480	/	/	630	5	9.4	W				
<b>FIA 8855-1999 TUBULAR STEEL FRAME SEATS</b>																				
<b>TRS-X HA/803</b>																				
FIA 8855/1999	TUBULAR STEEL			570	620	500	935	410	390	470	/	/	600	5	10.8	W Y				
<b>TRS-E SKY HA/760E / TRS LEGEND HA/775 / TRS-E PLUS HA/744E</b>																				
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	600	5	10.8	W Y				
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	600	5	10.3	W Y				
<b>TRS-E HA/741E / TRS-E XS HA/783E / TRS-E XL HA/781E</b>																				
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	600	5	10.3	W Y				
FIA 8855/1999	T. STEEL XS			520	600	420	870	395	330	470	/	/	575	5	10.2	W Y				
FIA 8855/1999	T. STEEL XL			625	680	540	950	450	415	520	/	/	655	5	12.3	W Y				